

16 AUG 2000

PCT

From the INTERNATIONAL BUREAU

**NOTICE INFORMING THE APPLICANT OF THE  
COMMUNICATION OF THE INTERNATIONAL  
APPLICATION TO THE DESIGNATED OFFICES**

|                  |  |
|------------------|--|
| Kopie<br>in/naar | TERMIN   |
|                  | 09 AUG 2000 (e 47.1(c), first sentence)                            |
|                  | Date of mailing (day/month/year)<br>voort. 27 July 2000 (27.07.00) |
|                  | Applicant's or Agent's file reference<br>MAP 49447PC00             |

To:

OTTEVANGERS, S.U.  
Vereenigde  
Nieuwe Parklaan 97  
NL-2587-BN The Hague  
PAYS-BAS

NR F 19-9-2000  
Prel. ex. gun 19-8-2000

**IMPORTANT NOTICE**

International application No.

PCT/NL99/00366

International filing date (day/month/year)

11 June 1999 (11.06.99)

Priority date (day/month/year)

19 January 1999 (19.01.99)

Applicant

WELL ENGINEERING PARTNERS B.V. et al

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:

AU,JP,KP,KR,US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

AE,AL,AM,AP,AT,AZ,BA,BB,BG,BR,BY,CA,CH,CN,CU,CZ,DE,DK,EA,EE,EP,ES,FI,GB,GD,GE,GH,  
GM,HR,HU,ID,IL,IN,IS,KE,KG,KZ,LC,LK,LR,LS,LT,LU,LV,MD,MG,MK,MN,MW,MX,NO,NZ,OA,PL,  
PT,RO,RU,SD,SE,SG,SI,SK,SL,TJ,TM,TR,TT,UA,UG,UZ,VN,YU,ZA,ZW

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on 27 July 2000 (27.07.00) under No. WO 00/43631

**REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)**

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

**REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))**

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No. (41-22) 740.14.35

Authorized officer


J. Zahra

Telephone No. (41-22) 338.83.38

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |           |   |
|--|-----------|---|
| (51) International Patent Classification <sup>7</sup> :<br><b>E21B 19/22, 19/20</b>  | <b>A1</b> | (11) International Publication Number: <b>WO 00/43631</b><br>(43) International Publication Date: <b>27 July 2000 (27.07.00)</b>  |
| (21) International Application Number: <b>PCT/NL99/00366</b><br>(22) International Filing Date: <b>11 June 1999 (11.06.99)</b><br>(30) Priority Data:<br>1011069                      19 January 1999 (19.01.99)                      NL<br>(71) Applicants (for all designated States except US): WELL ENGINEERING PARTNERS B.V. [NL/NL]; Tynaarlosestraat 68, NL-9481 AE Vries (NL). B.J. SERVICES INTERNATIONAL B.V. [NL/NL]; Vasco da Gamastraat 27, NL-7825 VJ Emmen (NL).<br>(72) Inventors; and<br>(75) Inventors/Applicants (for US only): KOSTER, Egbert [NL/NL]; Groenkampen 68, NL-9407 RG Assen (NL). KOCH, Kasper [NL/NL]; Wilhelminalaan 44, NL-2625 KH Delft (NL). VAN ONNA, Martinus, Bernardus, Stefanus [NL/NL]; Oostdijk 46, NL-4675 RE St. Philipsland (NL). ALTMANN, Klaus [DE/DE]; Röntgenstrasse 9, D-48465 Schüttorf (DE). BAKKER, Thomas, Walburgis [NL/NL]; Tynaarlosestraat 68, NL-9481 AE Vries (NL). PLATJE, Berend Harm [NL/NL]; Breedenborg 2, NL-9502 VT Stadskanaal (NL). |           | (74) Agent: OTTEVANGERS, S.U.; Vereenigde, Nieuwe Parklaan 97, NL-2587 BN The Hague (NL).<br>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).<br>Published<br>With international search report. |

(54) Title: PIPE HANDLING APPARATUS AND METHOD

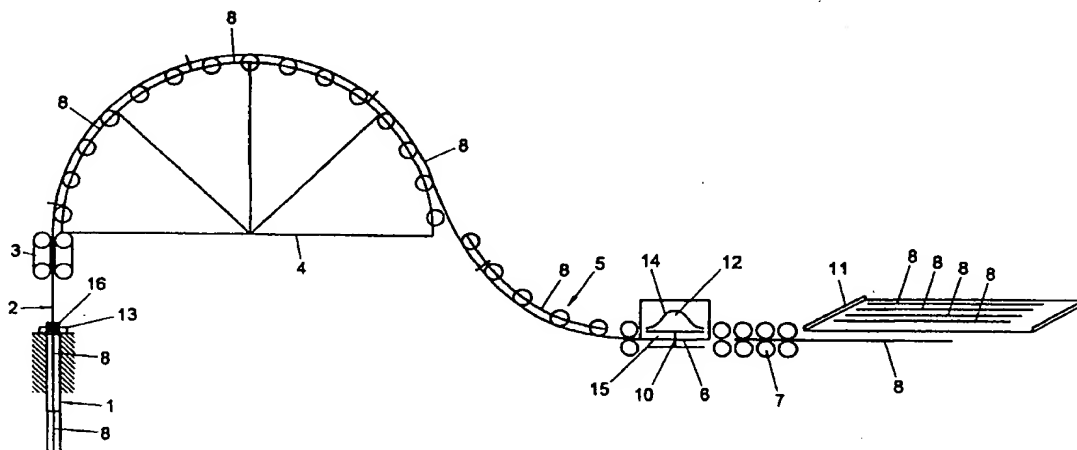

## (57) Abstract

For introducing a tube (2; 52; 102) into a borehole (1) in the ground, the tube (2; 52; 102) is composed by adding tube parts (8; 58) to an end thereof at a location horizontally spaced from the well head (13; 63; 113) and axially travels to the well along a path including a curve. The jointing takes place at a relatively easily accessible location, where the risk of injury due to large moving parts is smaller. The radius of curvature of the tube in the curved parts of the path can be relatively large, so that plastic deformation of the tube remains limited. Separate tube parts (8; 58) can be transported more easily than a completed tube in a coiled configuration. Further, a method for removing a tube from a borehole in the lithosphere and an installation for carrying out the proposed method are disclosed as well.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   | ML | Mali   | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | MN | Mongolia                                     | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MR | Mauritania                                   | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MW | Malawi                                       | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MX | Mexico                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | NE | Niger  | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NL | Netherlands                                  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NO | Norway                                       | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NZ | New Zealand                                  | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | PL | Poland                                       |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CN | China                    | KZ | Kazakhstan                               | RO | Romania                                      |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| CZ | Czech Republic           | LI | Liechtenstein                            | SD | Sudan  |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |
| EE | Estonia                  |    |  |    |  |    |                          |

JC18 Rec'd PCT/PTO .1 8 JUL 2001

## PIPE HANDLING APPARATUS AND METHOD

## FIELD AND BACKGROUND OF THE INVENTION

This invention relates to a method for introducing a tube into a borehole in the ground according to the introductory portion of claim 1. The invention further relates to methods for removing or retracting a tube from a borehole in the ground according to the introductory portions of claims 17 and 18 and to an installation for introducing a tube into a borehole in the ground according to the introductory portion of claim 19. Such an installation typically also serves the purpose of retracting a tube from a borehole in the ground.

Such methods and such an installation are known from practice for instance for inserting a production tube in a well for extracting oil or gas or for removing such a tube from a well, for instance in the course of maintenance to downhole devices. Such wells can also be used for other purposes, such as for the extraction of salt or geothermal energy. In the use of such a method and such an installation, tube parts are coupled through a screw coupling to the upper end of a tube reaching into the borehole. As the tube is introduced further into the ground, successive a tube parts, which can each be composed of one or more tube joints, are connected by screw couplings to the proximal end of the composed section of the tube end projecting from the ground until the tube has reached its final length. When the tube is removed this method is essentially reversed.

Introduction and removal of a tube in this manner is tedious and entails certain dangers. More in particular, operating in an area closely adjacent the well head entails handling problems because little space is available and the tube parts have to be connected and disconnected in a

generally vertical orientation, difficult access to the joint to be made or disconnected and dangers of fire, explosions and of injuries caused by manipulated heavy objects.

5       As an alternative, it is known to prefabricate a tube by welding the tube parts to each other and to wind the prefabricated tube onto a reel according as the length of the composed tube section formed from the tube parts increases with the addition of tube parts. The tube wound  
10 onto the reel is subsequently transported by road to the site where it is to be introduced into the ground. During insertion of the tube into the borehole, the reel is unwound. During retraction, the tube is wound back onto the reel.

15       A disadvantage of this method is that the tube parts needs to be deformed to a large extent to obtain a reel having a diameter small enough to be handled and transported. This has an adverse influence on the mechanical properties and the geometry of the tube parts and imposes  
20 stringent requirements on the quality of the material, which should be such that the material, after the considerable deformations, still reliably meets the technical requirements applying in installed condition.

## 25 SUMMARY OF THE INVENTION

It is an object of the invention to avoid, at least to a considerable extent, the drawbacks associated with the above methods and installations.

30       This object is achieved according to the present invention by carrying out a method for introducing a tube into a borehole in the lithosphere in accordance with claim 1. In conjunction with the removal or at least retraction of tubes from a well, this object is achieved by  
35 carrying out a method for removing or retracting a tube from a borehole in the ground in accordance with claim 17 or 18. The invention further provides an installation according to

-3-

claim 17 which is specifically adapted for carrying out such methods.

Since connecting tube parts or disconnecting tube parts from a tube, and hence also the associated storage and displacement of tube parts, occurs in each case at a horizontal distance from the well head or - if the tube is temporarily stored without disassembling - the tube parts are not disconnected at all, the need of carrying out the connecting or disconnecting operations at the well is obviated.

Further, the separate tube parts of which a tube is to be composed can be transported to a drilling site more easily and more efficiently than in a configuration wound up into a coil.

Another important advantage of advancing the tube into the well along a curved path is that the assembly and introduction of the tube does not require the use of a rig. Round tripping including the extraction and re-introduction of a tube into a well can be carried out without a rig as well. Therefore, a rig used for drilling can be removed earlier so that important cost savings can be made.

Nevertheless, compared to the known system of supplying the tube in wound form, plastic deformations of the tube material are at least substantially reduced, so that the requirements the tube material has to meet are less stringent.

Particularly advantageous elaborations of the invention are set forth in the dependent claims. Further objects, elaborations, effects and details of the invention appear from the following description, in which reference is made to the drawing.

#### BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 is a schematic representation in side view of a first example of an installation for carrying out the method according to the invention;

Fig. 2 is a schematic representation in top plan view of a second example of an installation for carrying out the method according to the invention;

Fig. 3 is a schematic representation in side view of  
5 the installation according to Fig. 2;

Fig. 4 is a schematic representation in top plan view of a portion of a third example of an installation for carrying out the method according to the invention in a first operating condition;

10 Fig. 5 is a schematic representation in side view of the portion of the installation according to Fig. 4;

Fig. 6 is a schematic representation in top plan view of a larger portion of the installation according to Fig. 4 in a second operating condition; and

15 Fig. 7 is a schematic representation in side view of the portion of the installation according to Fig. 6.

#### DETAILED DESCRIPTION

20 Although the exemplary elaborations discussed below generally relate to composing and inserting a tube into a borehole in the ground, these elaborations can also be applied in reverse direction for removing or at least retracting a tube from a borehole in the ground.

25 Fig. 1 shows a well 1 and a tube 2 which is being composed and introduced into the well 1. The tube 2 is made up of interconnected tube parts 8. The tube 2 extends both inside and outside the bored well 1. Outside the well 1, the tube 2 is guided along a guide path with guides 4, 5. The  
30 guide path starts near a proximal end 10 of the tube 2, first extends horizontally through a passage 15 and then, via smooth arcs, merges into a vertical portion in line with the borehole 1, where a lead-in device 3 - which serves to retain the tube axially and in a sense of rotation - engages  
35 the tube. The guides 4, 5 are provided with rollers over which the tube 2 can roll in axial direction. Preferably,

the rollers are steerable castoring wheels, so that the rollers can accommodate to any rotation of the tube 2.

Owing to the bent course of the guide path, the proximal end 10 of the tube 2 is located outside the line of the bored well 1. The guides 4, 5 provide that the proximal end 10 of the tube 2 is oriented substantially horizontally in the area of a connecting device 6 for successively adding a tube part to the proximal end 10.

The geometry of the path along which the tube 2 passes is such that the tube 2 is plastically deformed to a slight extent. The maximum deformation of the tube in the curves of the path is preferably less than 2% and more preferably less than 1%. Such small plastic deformations have relatively little adverse effect on the mechanical properties of the tube 2, even without the use of special steel alloys having improved resistance to fatigue and deformations. It is noted that the plastic deformation of the tube in the area where it enters a curved section of the path can be utilized with particular advantage for installing production tube, which is generally not rotated about its axis when being introduced.

If a tube which is deformed plastically in a curved axial feeding path between a jointing position and the well is to be rotated about the axis of the well, the composed tube is preferably stored in composed condition in the form of a coil (as is described in further detail below) and the coil as a whole is preferably rotated about the axis of the bore hole in the vicinity of the well head.

To achieve the desired limitation of the deformation of the material of the tube, the radius of each bend in the path of the tube 2 should be sufficiently large. For instance steel tubes having a 55 mm outer diameter, which are typically used in oil extraction, can be bent to a curve having a 2.75 m radius if a deformation of 1% is allowed. For comparison: if the deformation of the same type of tube is limited to 0.16 %, so that only elastic deformation occurs, a radius of 18 m is the smallest allowable radius.



Thus, by allowing some plastic deformation of the tube as it travels along the curved path section, a curved path section of a considerably smaller radius can be employed than if deformations are limited to elastic deformation.

5 Accordingly, the amount of space required at the well site and the required size of the transport structure can be kept substantially more limited than if only elastic deformation is allowed. However, since the radius does not have to be as small as in tubing which is transported in coiled condition,  
10 the deformation can be kept sufficiently small to avoid the need of specifically adapted materials, in particular special kinds of steel, to ensure that the tube after placement satisfies the requirements set.

A further advantage of the plastic deformation of the  
15 tube is that the tube is easier to guide in the curved path section, since the curvature of the tube substantially defines the curves of the path along which the tube travels axially. Moreover, in the event of accidental release of the curved portion of the tube, a tube which is plastically bent  
20 into a curved path tends to spring back at least substantially less than a tube which is elastically deformed into a curved path, and is therefore much safer.

By means of the connecting device 6, the tube 2 can be extended by a next tube part or tube section 8. Such tubes  
25 sections 8 are present in a storage 11, where these tube sections 8, in this example, are stored horizontally and parallel to an end portion of the tube that connects to the proximal end 10 of the tube 2.

For extending the tube 2 by a next tube part, a tube  
30 part 8 is taken from the storage 11 and supplied to the connecting device 6 by means of a conveyor 7. The connecting device 6 is provided in the form of a mechanized welding machine. Such devices are commercially available and therefore not further described here. The proximal end 10 of  
35 the tube 2 is also located in the welding machine 6.

By each time welding a tube part to a proximal end 10 of the tube 2, very reliably sealed connections between the

tube parts 8 are obtained. Moreover, such welded connections form considerably smaller thickenings of the tube than, for instance, the known screw connections, or even do not form a thickening of significance at all.

5        Since the tube is composed from the tube parts at the well site, the composed tube does not have to be transported. Therefore, the curvature in the tube can have a greater radius than if the tube needs to be transported in coiled condition. As has been explained hereinbefore, a  
10 relatively great radius is advantageous because the plastic deformation then remains limited so that the requirements the tube material has to meet to ensure that the tube material can withstand such deformations and then still meet the requirements imposed by the operating conditions in the  
15 well are less stringent.

By virtue of the form in which the tube 2 is held by the guides 4, 5, the proximal end 10 of the tube 2 is remote from the bored well 1. As the provision of a next tube part 8 occurs at a horizontal distance from the well head, the  
20 jointing and associated manipulation of the tube parts 8 can take place at a location which is much easier accessible, where more space is available and where there is less risk of injury due to large moving parts. It is noted that this effect is also of advantage if the connection between the  
25 tube and a tube part to be added is obtained in a different manner than through welding. In the making of the connections by welding, however, a suitable location and orientation of the tube parts to be connected are of particular importance.

30        Particularly in the case of boreholes where oil and/or gas may be found, an area around the well head 13 involves a risk of fire and explosions. By carrying out the jointing operations at a distance from the well head 13, they can be carried out outside the area involving a particularly great  
35 risk of fire and explosion. It is noted that generally, to achieve this effect, it is required that the tube is closed off between the well and the proximal end of the tube in the

connecting area. This can for instance be achieved using a plug mounted on a rod or a cable extending into the tube, which plug is retained in a position closing off the tube in a position axially spaced from the end of the tube in the  
5 connecting area.

Further, the space 12 where welding occurs is screened off from the drilling environment and the outside climate by a shell 14, so that the risk of fire and explosions is further reduced. The horizontal distance between the well  
10 head 13 and the place where welding occurs is preferably at least 10 m and more preferably at least 15 to 17 m.

In the exemplary embodiment according to Fig. 1, the tube parts 8 are added to the tube 2 in a horizontal orientation relative to the bored well. However, other  
15 orientations remote from the bored well can also be used, such as, for instance, parallel to the bored well or at an oblique angle relative to the bored well. A horizontal orientation of the tube parts 8 in the area where they are added to the tube 2 provides the advantage that standard  
20 machines for joining tubes together can be used in their normal orientation.

The welding machine 6 welds a tube part 8 to the tube 2 each time when the proximal end 10 of the tube 2 has reached the welding zone of the welding machine 6.  
25 Consequently, the tube 2 is each time extended by the length of the tube part 8.

Thereupon, the tube 2 is displaced over the length of the tube part 8 just added, along the above-described path, whereby the tube 2 is inserted deeper into the bored well 1.  
30 To that end, the lead-in device 3 is set into operation.

If the lead-in device 3 is further arranged for rotating the tube 2, the tube 2 is rotated in the hole 1, and the portion of the tube 2 that projects outside the borehole 1 is rotated about its axis as well, it is  
35 advantageous if the tube 2 in the area of the guides 4, 5, where the axis of the tube 2 is curved, is exclusively elastically deformed with respect to the straight initial

form in which the tube parts are supplied. The repeated deformation occurring during rotation, of the portion of the tube 2 that curves through the guide 4, 5 then remains without essential disadvantageous consequences for the loadability and the shape of the tube parts 8 in question, although after prolonged flexing of the same portion of tubing, fatigue can cause problems. Axial rotation of the tube 2 is particularly advantageous during the drilling of a well or the insertion of a wall, a so-called casing, in the bored well.

Although the present example is based on a single tube, the invention is also applicable in the case of the insertion of a tube composed of concentric tubes. It is then preferred not to deform the tube plastically. The different concentric tube parts can be provided one after the other in the bored well, or be installed simultaneously.

Connecting the tube parts 8 to each other by welding can be applied with particular advantage when inserting tubes into a well with an overpressure prevailing under a sealing 16 at the upper end of the well, a situation sometimes referred to as "underbalanced". Since the welded tube 2 has a much more constant outside diameter than a tube composed of tube parts screwed together, the borehole 1 adjacent the well head 1 can be better sealed by means of a sealing, such as, for instance, a blow-out preventer. It is then especially of importance that the sealing 16 against the tube 2, when it is being passed by connections between tube parts 8, needs to bridge considerably smaller differences in diameter than is the case in the use of a tube composed of parts screwed together.

The installation shown in Fig. 1 can also be used for removing or retracting the tube 2 from the well 1. Depending on the situation of the well site, the tube 2 can be decomposed at the welding machine, for instance by cutting or by disconnecting couplings included in the tube for this purpose, or be left intact and extended along the ground. If the tube is decomposed into sections, the sections can for

instance be of the size of the original tube parts or of a larger size.

Figs. 2 and 3 represent an exemplary embodiment of the invention with which likewise a tube 52 is introduced via a well head 63 into a bored well. The tube 52 is made up of tube parts 58 joined together. Outside the bored well, the tube 52 extends along a path which, starting from a proximal end 60 of the tube 52 towards the well head 63, first extends approximately horizontally, and then passes via an arc, bent over  $270^\circ$ , to merge into a vertical part in line with the borehole, where a lead-in device 53 engages the tube 52.

Between the approximately horizontal portion and the portion located in line with the borehole, the tube 52 is bent exclusively in one direction relative to the portions in question of the tube 52. This means that if a particular tube section moves through the curved path section 69, it is bent to a curve just a single time and in a single direction, and it is straightened only once and in a single direction. Thus, each portion of the tube, as it travels from the horizontal path section to the path section projecting into the ground or back, is bent only once and bent back only once during each trip of composing and inserting a string of tubing into the well. The same applies, but in the opposite direction, if the tube 52 is removed or retracted from the well. Deterioration of the mechanical properties of the material of the tube 52 as a result of plastic deformation of the tube 52 is thereby limited.

That each plastically bent portion of the tube 52, as it leaves the curved path section 69, is bent back again, provides the advantage that the tube 52 fits into the substantially straight borehole without the deformations applied upon entry of the curved path section 69 leading to great transverse forces between the tube and the wall of the borehole.

Here, too, the radius of the curved path section 69 of the tube 52 is such that the tube 52 is plastically deformed to a slight extent only, so that the mechanical properties of the tube 52 suffer little, if noticeable at all, and a  
5 tube 52 can be introduced into and removed from a well a large number of times.

For adding tube parts 58 to the tube 52, the installation is provided with a welding machine 56. For supplying tube parts 58 to be added, the installation is  
10 provided with a roller path 57 with a transport roller pair 70 at an end thereof.

Downstream of the welding machine 56, a transport roller pair 71 forms an upstream end of a conveyor 72 which extends to a bending machine 67.

15 Also in the use of the installation according to Figs. 2 and 3, the form of the tube 52 downstream of the welding machine 56 provides that the proximal end 60 of the tube 52 is located at a distance from the well head 63.

The bending machine 67 also directs the axially  
20 traveling tube 52 via the curved path section 69 shown. The installation is provided with a further machine 68 for bending back the tube material, which may be formed by yet another bending machine or by a straightening machine. Straightening machines typically have more rollers than  
25 bending machines. The first (as viewed in the direction of transport) tube bending machine 67 bends the tube 52 to a curve as the tube 52 is passed axially through the bending machine 67. The curvature applied by the bending machine preferably has a slightly greater radius than that which is  
30 needed to reach the bending-back machine 68 via the arc 69. Accordingly, some additional bending is needed to reach the bending-back machine 68. This is obtained by elastic deformation of the tube 52. By combining plastic and elastic deformation of the tube 52 to obtain a curved shape, less  
35 plastic deformation is needed than if the same curved shape is obtained by plastic deformation only, so that less force is needed to bend the tube to a curve, and a substantially

reduced mechanical deterioration of the material is obtained.

For leading-in a leading portion of a new tube 52, and thereby, through elastic bending, rendering it more curved than the curvature applied by the bending machine 67, the leading portion can be coupled to a cable which is pulled in by the bending-back machine 68 and which pulls the leading end of a tube to the well head 63. Instead of by using a bending machine, the bending of the tube into the curved path section 69 can also be achieved solely by guiding the leading portion from the conveyor 72 to the feeding unit 53 for introducing the tube 52 into the well head 63, whereby the tube 52, as it travels along the curved path portion 69, is subject to a maximum elastic deformation and therefore, at a given bending radius, is subject to a minimal plastic deformation.

That the tube 52 is bent by a bending machine 67 as it enters the curved path section 69 provides the advantage that the curvature provided by the bending machine 67 also determines the further path of movement of the tube 52, at least to an important extent, so that between the point where the tube 52 is bent to a curve and the point where the tube 52 is bent straight again, no or very little guidance is needed and a relatively simple transport construction can be provided.

Figs. 4-7 represent portions of the same apparatus in two operating stages. Some parts of the installation that are not relevant to the differences between the above-discussed installations and that according to Figs. 4-7, such as the lead-in device for introducing the tube into the bored well and the machine for adding tube parts to the tube, are not shown in Figs. 4-7. In the first stage (Figs. 4 and 5), the tube 102 is supplied in a supply direction indicated by an arrow 123, from a welding machine in which a tube part has been, and is, added to the tube 102 as the proximal end of the tube (not shown) reaches the welding machine upon displacement of the tube 102 in the

direction indicated by the arrow 123. Upon reaching the bending machine 117, the tube is plastically deformed to a curved form and passed along an approximately circular path along supporting rollers 124, 125, which are suspended from a frame 126 before and behind (as viewed in the supply direction 123) the bending machine 117, for rotation about their longitudinal axes. As more tube material is supplied, a spiral and essentially helical curl of tube material is formed, which is supported on and between the rollers 124, 125. When the tube 102 has reached the required length, or when the rollers cannot carry more tube material, the supply of tube material is stopped.

As is represented in Figs. 6 and 7, the frame 126 with the rollers 124, 125 for temporarily storing a tube 102 formed and wound into a helical form at the well head 113 is arranged so close to the well head that material of the tube 102 can be unwound from the helical configuration and be axially transported further via an arcuate path in a direction indicated by an arrow 127 to the well head 113.

To be able to unwind the tube 102, the bending machine 117 is displaceable to a position 117' along a portion of the tube 102 which is located on the side of the helically rolled-up tube 102 remote from the well head. In the position 117', the bending machine is set for reducing the bend of the tube 102 as it passes the bending machine 117', so that the tube 102 departs from the helical form 128, and via an arc 129 with a radius greater than that of tube material in the helical portion 128 of the tube 102, moves axially to a bending machine 130 in line with the well head 113 which further straightens the tube.

By completing the composition of the tube or at least a section of the tube before bringing the tube into the well the insertion of the tube can be carried out very rapidly as soon as the bored well has been cleared for insertion of the tube 102, because insertion is not delayed by the necessity of adding a tube part every time. Conversely, composing the tube is not delayed in that the transport speed of each



added tube part is limited by the maximum insertion speed of a tube. Further, the logistic planning of the composition and insertion of a tube is simplified because personnel and equipment for composing the tube do not necessarily need to  
5 be available at the actual time of insertion. Thus, by at least partially carrying out the on-site composition of the tube before the well into which it has to be inserted is ready for receiving the tube, substantial time gains can be achieved.

10 Owing to the coiled form in which the tube is temporarily stored, the tube 102 can nonetheless be held ready in a compact space before being introduced. However, at sites where sufficient space is available (for instance in a remote desert area or at a location where a length of  
15 unused road or railroad is available) the pre-composed tube or tube sections can also be stored as a length of tubing extending along the ground as was described in conjunction with Fig. 1.

If a string of tubing is subsequently retracted from  
20 the well and stored in a coiled configuration, it can even be retracted and re-inserted without being bent more than once and without being bent back more than once. So that deterioration of material properties due to deformation thereof is kept very limited.

25 Compared with the transportation to the site of a tube in a coiled form, the advantage is maintained that radius of curvature of the tube can be relatively large, so that less stringent requirements are imposed on the material of the tube.

30 Another advantage of completing the composition of the tube or at least a section of the tube before bringing the tube in communication with the well is, that the risk of fire and explosions is particularly reduced. Since the tube being composed is not connected to the well while it is  
35 composed, it does not need to be closed off to avoid that the channel in the tube is in communication with the well causing the hazard area where a particular risk of explosion

and fire exists to extend to the free end of the tube projecting from the well.

Yet another advantage of completing the composition of the tube or at least a section of the tube before bringing  
5 the tube in communication with the well is, that the entire tube or tube section can be tested for leaks and pressure resistance before being introduced into the well.

There are various options for the precise setting of the bending machines 117' and 130 in the unwinding of the  
10 tube 102 from the helical form 128.

It is, for instance, possible to set the bending-back machine 117' such that it bends the tube 102 just straight as it passes that machine 117'. The radius of the arcuate path portion 129 should then be preferably selected so great  
15 that the tube portions just bent straight again are exclusively deformed elastically as they follow the arcuate path section 129. The bending-back machine 130 downstream of the bending-back machine 117' then runs along passively without deforming the tube 102 further, and may optionally  
20 be replaced with a guide roller.

It is also possible not to deform the tube plastically at all at the bending-back machine 117' and to have the plastic deformation back to the straight initial form occur solely when the tube passes the bending machine 130 with an  
25 exit in line with the well head 113. In that case, the radius of the arcuate path section 129 is then preferably chosen to be so small that the tube 102, as it follows the arcuate path section 129 starting from the form in which it was disposed in the helical portion 128 of the tube 102, is  
30 not deformed or deformed elastically only. The bending-back machine 117' upstream of the bending-back machine 130 then idles passively without deforming the tube 102 and may optionally be replaced with guide rollers. In that case, it is advantageous to provide that the bending machine 117 is  
35 displaceable to a position in which the exit thereof is in line with the well head - in this example the position of the bending-back machine 130.

It is also possible to opt for a middle road between these two settings, whereby the tube 102, when being unwound from the helical form, is bent back into a form which is straight in unloaded condition, in two operations, i.e. at the location of the bending machines 117' and 130, respectively.

The provision of an arc shaped curved section 129 between the coil and the well, which curved section 129 has a larger radius than the coil provides the advantage that the coil can be located over some horizontal distance spaced away from the well 113. This horizontal distance is largest if the curved section with the enlarged radius departs from the portion of the tube 102 with the smaller arc in a vertically upward direction. However, it is also possible to provide that, instead of the position 117', the alternative position of the bending machine 117 is elsewhere along the portion of the tube 102 with the smaller arc, for instance lower or even at the position of the bending machine 117. In the latter case, if the small and enlarged radiuses are identical, the horizontal distance between the portion of the tube 102 with the smaller arc and the well 113 is about half the distance in the example as shown in Fig. 7.

It is also possible to arrange the coil in such a position, that the axis of the well tangentially meets the coil and to provide that the straightening device is located with its operative part substantially in line with the well also. The tube portions unwound in a downward direction from the coil can then be lead into the well directly and vertically downward while in an essentially straight form.

It will be clear to those skilled in the art that within the scope of the invention, many alternative modes and designs are possible, different from the examples described hereinabove.

By way of non-limiting example, it can be mentioned, for instance, that for leading-in the leading end of a tube, many different facilities can be utilized, such as a cable

or a system of run-in guides in stationary positions along the intended path of a tube. Facilities for supporting the tube wound into a helical form can be designed in different ways, for instance with a roller for supporting the tube in the upper area of the helical form and/or with facilities for keeping the tube in the helical form under an elastic bias, so that the tube needs to be deformed plastically only to a relatively slight extent to obtain a helical form of a certain diameter. Instead of, or supplemental to, a helical form, the wound tube can also have a spiral form, so that the tube can be wound in several coaxial layers.

Furthermore, the tube can form a section of a larger tube assembly composed or to be composed of two or more of such tubes which are for instance each composed and then stored separately in a helical or spiral configuration. After a first tube is introduced into the well, a next tube is connected thereto and then the first tube is inserted deeper into the well with the connected next tube following the first tube into the well.

## Claims

1. A method for introducing a tube (2; 52; 102) into a borehole (1) in the ground, comprising the actions of:

composing said tube (2; 52; 102) by connecting successive tube parts (8; 58) end-to-end in a connecting

5 area, and

axially displacing at least a composed section of said tube (2; 52; 102) from said connecting area towards said borehole (1) and introducing at least a substantial portion of said tube or said composed section thereof (2; 52; 102)

10 into said borehole (1),

**characterized in that**, said connecting area is located at least horizontally spaced away from the borehole (1), and that said axial displacement of said tube or said composed section thereof (2; 52; 102) from said connecting area to

15 said borehole (1) proceeds along an at least partially curved path (69; 128, 129).

2. A method according to claim 1, wherein said connection of successive tube parts (8; 58) end-to-end into said tube (2; 52; 102) is completed before said tube (2; 52; 102) is brought in communication with said borehole (1).

20

3. A method according to claim 1 or 2, wherein said path along which said tube or said composed section thereof (102) is displaced includes at least one complete winding.

4. A method according to claim 3, wherein said path

25 along which said tube or said composed section thereof (102) is displaced includes at least a spiral or helical portion.

5. A method according to any one of the preceding claims, wherein said tube parts are oriented at an angle to a topmost portion of said borehole (1) during said

30 connection of said tube parts.

6. A method according to claim 5, wherein said tube parts are oriented substantially horizontally during said connection of said tube parts.

7. A method according to any one of the preceding claims, wherein said tube or said composed section thereof (2; 52; 102) is plastically bent to a curved shape where it enters a curved portion of said path.

5        8. A method according to claim 7, wherein plastically bent portions of said tube or said composed section thereof (2; 52; 102) are plastically straightened where it leaves said curved portion of said path.

9. A method according to claim 7 or 8, wherein maximum  
10 total deformation during said bending into said curved shape is less than 2%.

10. A method according to any one of the preceding claims, wherein portions of said tube or said composed section thereof (2; 52; 102) proceeding along said curved  
15 path are bent into at most one single curve.

11. A method according to claims 8 and 10, wherein said plastical straightening of said tube or said composed section thereof (2; 52; 102) when leaving said curved portion of said path occurs a single time at most for each  
20 portion of said tube or said composed section thereof (2; 52; 102).

12. A method according to any one of the preceding claims, wherein portions of said tube or said composed section thereof (8; 58) proceeding along a curved section  
25 (69; 128, 129) of said path are in an at least elastically deformed condition.

13. A method according to any one of the preceding claims, wherein each portion of said tube or said composed section thereof (2; 52; 102) is bent to a curved shape in  
30 exclusively one direction relative to that portion of said tube (2; 52; 102).

14. A method according to any one of the preceding claims, wherein the borehole (1) in the area of a well head (13; 63, 113) is held sealed against said tube or said  
35 composed section thereof (2; 52; 102), and wherein an overpressure prevails under the sealing (16).

15. A method according to any one of the preceding claims, wherein said connecting of said the tube parts (8; 58) is carried out by welding.

16. A method according to claim 15, wherein the  
5 welding occurs in a screened space (12).

17. A method for retracting or removing a tube (2; 52; 102) from a borehole (1) in the ground, comprising the actions of:

retracting at least a substantial portion of said tube  
10 (2; 52; 102) from said borehole (1),

axially displacing said tube (2; 52; 102) from said borehole (1) towards a connecting area, and

disconnecting tube parts from said tube (2; 52; 102) in said connecting area,

15 **characterized in that**, said connecting area is located at least horizontally spaced away from the borehole (1), and that said axial displacement of said tube (2; 52; 102) from said borehole (1) to said connecting area proceeds along an at least partially curved path (69; 128, 129).

20 18. A method for retracting or removing a tube (2; 52) from a borehole (1) in the ground, comprising the actions of:

retracting at least a substantial portion of said tube (2; 52) from said borehole (1), and

25 axially displacing said tube (2; 52) away from said borehole (1),

**characterized in that**, said axial displacement of said tube (2; 52) away from said borehole (1) proceeds along an at least partially curved path (69) to a storage area, and  
30 in that said tube or a substantial portion thereof (2; 52) is stored in said storage area in a configuration in which maximal deformation relative to an essentially rectilinear configuration is less than 2%.

19. An installation for composing a tube (2; 52; 102)  
35 and introducing same via a well head (13; 63, 113) into a borehole (1) in the ground, comprising:

a connection structure (6; 56) for composing the tube (2; 52; 102) by connecting successive tube parts (8; 58) end-to-end in a connecting area, and

a transport structure (3, 4, 5; 53, 67, 68; 117, 124, 125, 130) for axially displacing said tube or a composed section thereof (2; 52; 102) from the connection structure (6; 56) towards the well head (13; 63, 113), and for introducing at least a substantial portion of said tube or said composed section thereof (2; 52; 102) into said well head (13; 63, 113),

**characterized in that** said connecting area is located at least horizontally spaced away from said well head (13; 63, 113), and that said transport structure (3, 4, 5; 53, 67, 68; 117, 124, 125, 130) is arranged for axially displacing said tube or said composed section thereof (2; 52; 102) along an at least partially curved path (69; 128, 129).

20. An installation according to claim 19, wherein said connection structure (6; 56) is provided with a passage (15) for receiving a tube part (8; 58) to be connected, said passage (15) being located out of alignment with the well head (13; 63, 113), and said passage (15) being oriented at an angle with respect to the well head (13; 63, 113).

21. An installation according to claim 20, wherein said passage (15) is oriented horizontally.

22. An installation according to any one of claims 19-21, wherein said transport structure comprises: a bending machine (67; 117) for plastically bending tube material to a curved form, having an inlet for leading in tube material to be bent, in line with a portion of said path section connected to and downstream of said connection structure (56).

23. An installation according to claim 22, wherein said transport structure further comprises a bending-back machine (68; 130) for plastically straightening tube material from a curved form to an at least straighter form, said bending-back machine (68; 130) having an outlet for



leading out tube material, located in line with the well head (13; 63, 113).

24. An installation according to claim 22, wherein said bending machine (117) is reciprocable between a run-in  
5 position with an inlet for leading in tube material to be bent in line with a supply path section connected to and downstream of the connection structure, and a run-out position (117') along a vertical portion of said path substantially parallel to an main passage of said well head  
10 (113).

25. An installation according to any one of claims 19-24, wherein said at least partially curved path (69; 128) defined by the transport structure (53, 67, 68; 117, 124, 125, 130) has a smallest radius, and wherein said bending  
15 machine (67; 117) for plastically deforming tube material to a curved form is arranged for applying a plastic deformation which results in a radius in unloaded condition that is greater than said smallest radius of said at partially curved path (69; 128).

20 26. An installation according to any one of claims 19-25, wherein said transport structure (117, 124, 125, 130) is arranged for keeping said tube (102) in an at least spirally or helically curved configuration (128).

27. An installation according to any one of claims  
25 19-26, further comprising a sealing (16) for sealing the well head (13; 63, 113) against said tube or a composed section thereof (2; 52; 102) for preventing fluid from flowing out of the borehole (1).

28. An installation according to any one of claims  
30 19-27, wherein said connection structure (6; 56) is in the form of a welding device.

29. An installation according to claim 28, wherein the welding device comprises a screening (14) surrounding the welding device.

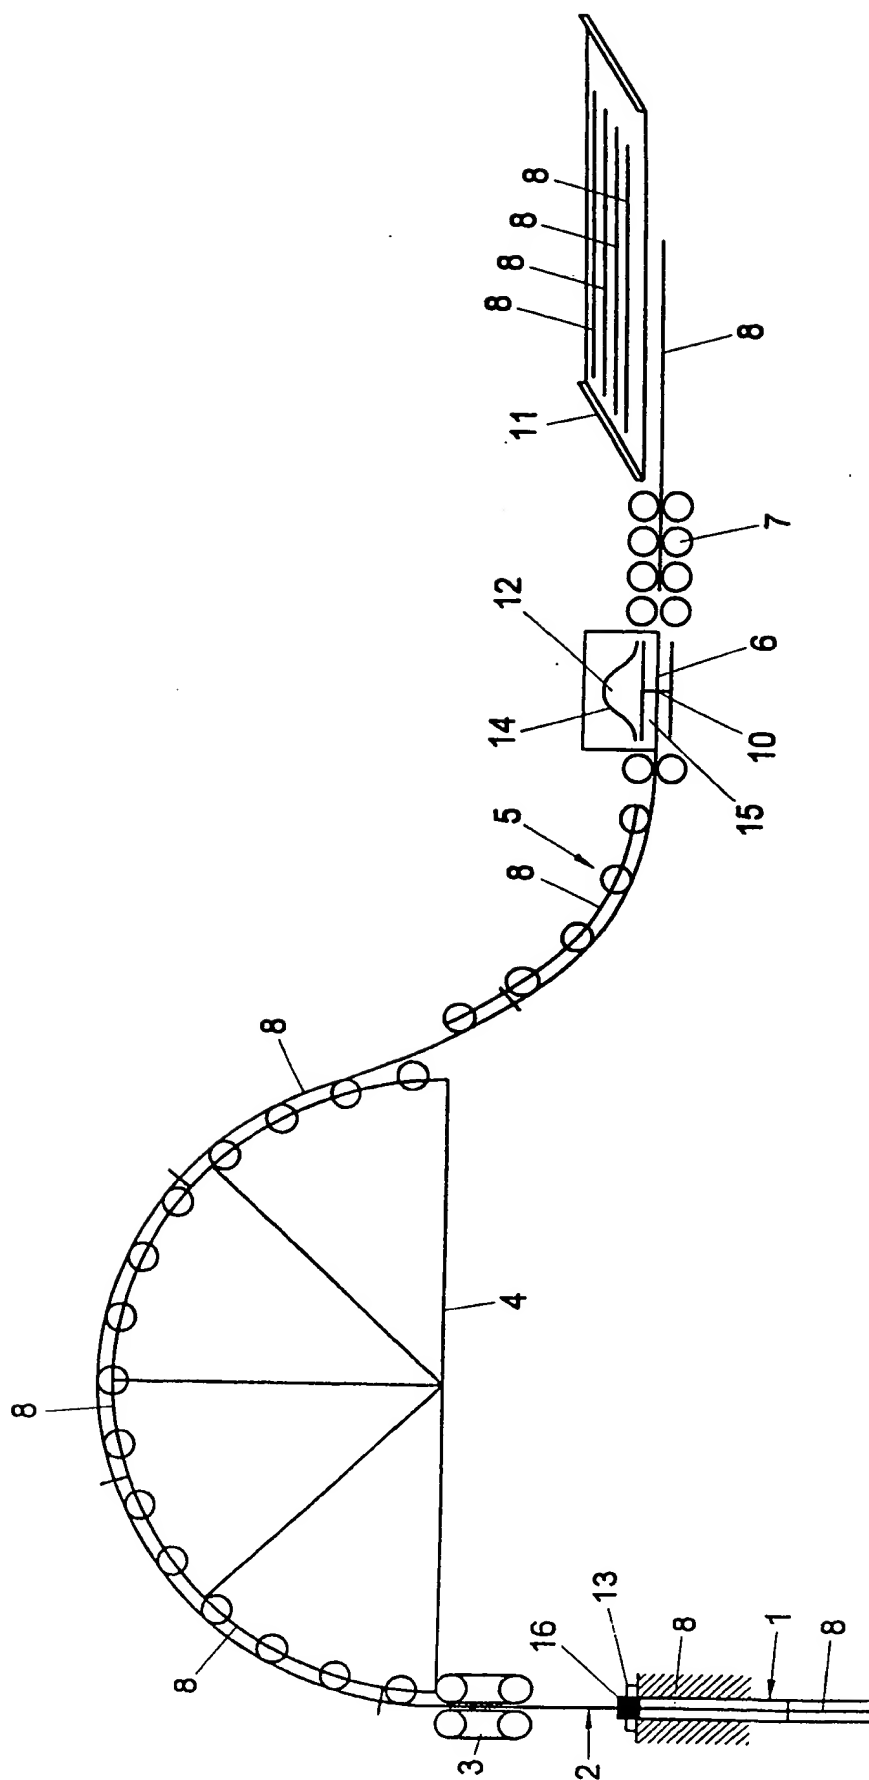


Fig. 1

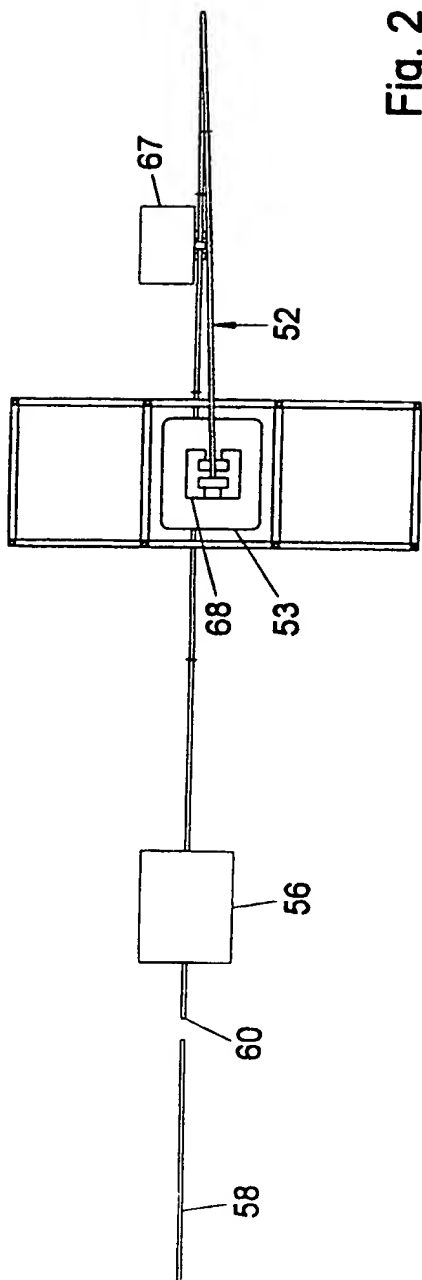


Fig. 2

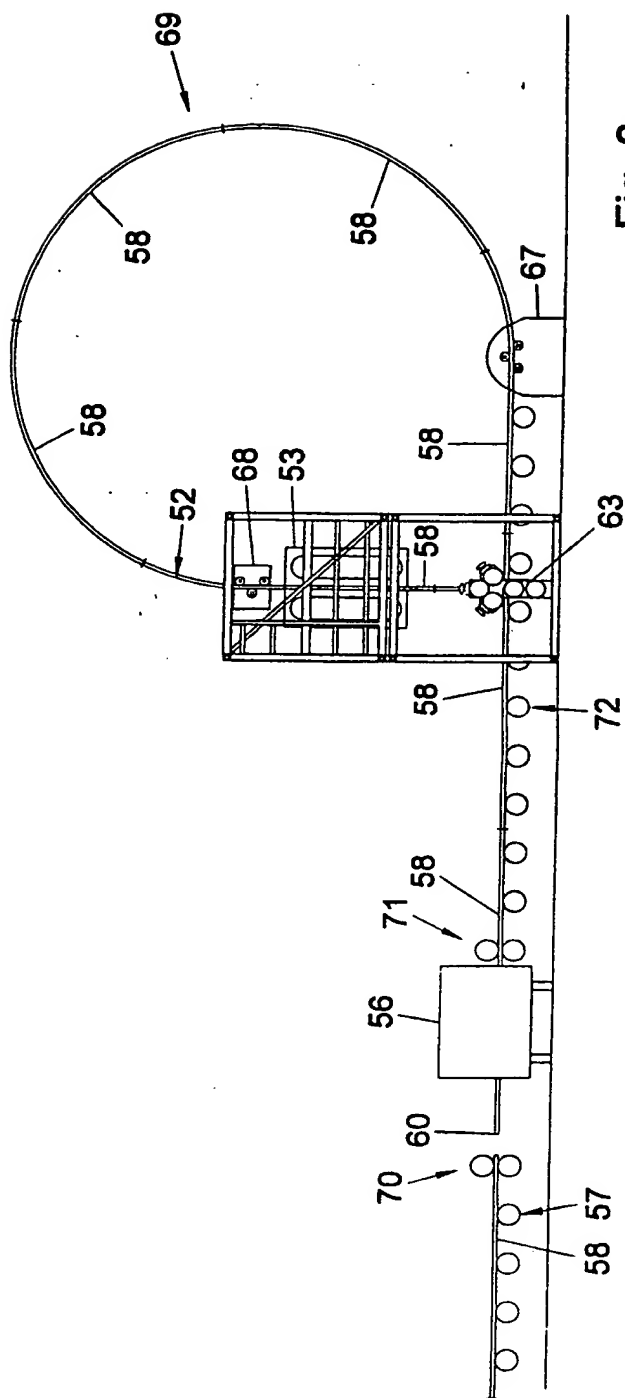


Fig. 3

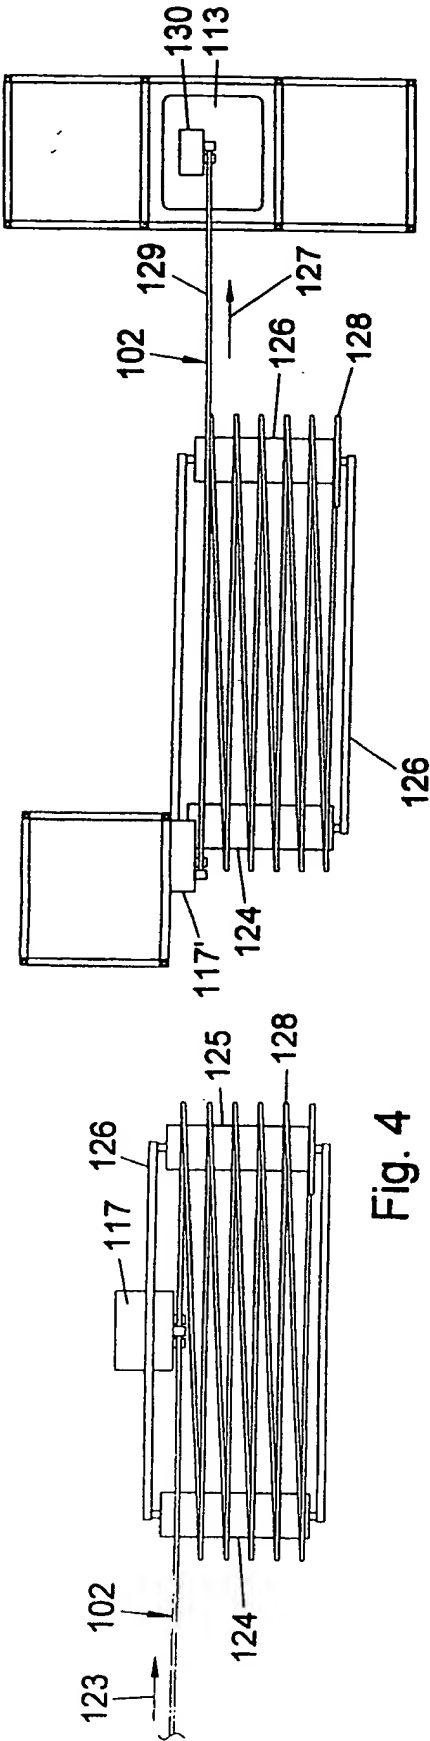


Fig. 4

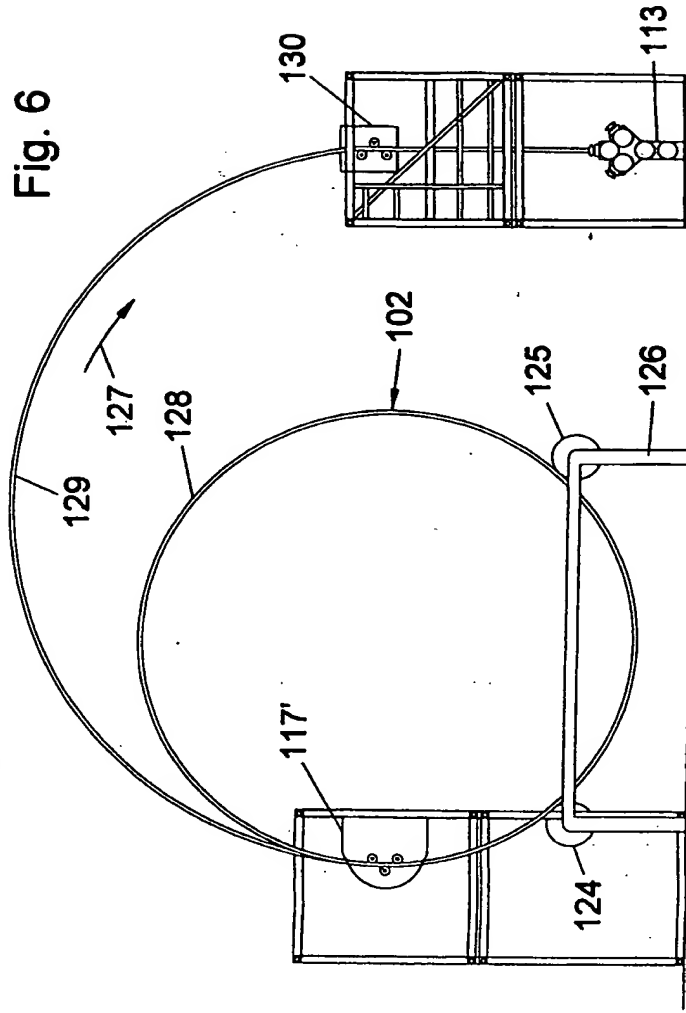


Fig. 5

Fig. 6

Fig. 7

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E21B19/22 E21B19/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                                  | Relevant to claim No.                      |
|------------|---|--|
| X          | US 3 677 345 A (SIZER PHILLIP S)<br>18 July 1972 (1972-07-18)<br><br>column 1, line 41-48<br>column 2, line 34-55   | 1, 2, 5, 6,<br>12, 17,<br>19-21,<br>26, 27 |
| Y          | ---   | 7, 8, 15,<br>16, 28, 29                    |
| Y          | US 5 823 267 A (MAKOHL FRIEDHELM ET AL)<br>20 October 1998 (1998-10-20)<br>column 3, line 53-60                     | 7, 8                                       |
| Y          | EP 0 396 204 A (SHELL INT RESEARCH)<br>7 November 1990 (1990-11-07)<br>claims 1, 2, 4<br>figure 1<br><br>---<br>-/- | 15, 16,<br>28, 29                          |

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

25 August 1999

Date of mailing of the international search report

02/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schouten, A

| Category | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|----------|--|-----------------------|
| A        | US 3 667 554 A (SMITHERMAN EUGENE A)<br>6 June 1972 (1972-06-06)<br>the whole document<br>---                                | 1,17-19               |
| A        | US 3 724 567 A (SMITHERMAN E)<br>3 April 1973 (1973-04-03)<br>the whole document<br>---                                      | 1,17-19               |
| A        | US 4 848 455 A (FENYVESI JANOS)<br>18 July 1989 (1989-07-18)<br>the whole document<br>---                                    | 1,17-19               |
| A        | US 5 013 880 A (PUETTMANN FRANZ-JOSEF)<br>7 May 1991 (1991-05-07)<br>claim 1<br>----   | 15,16,<br>28,29       |
| A        | GB 1 405 359 A (INST ELEKTROSWARKI<br>PATONA;NAUK UK SSSR)<br>10 September 1975 (1975-09-10)<br>claim 1<br>figure 2<br>----- | 15,16,<br>28,29       |

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NL 99/00366

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| US 3677345                                | A | 18-07-1972          | NONE                       |                     |
| US 5823267                                | A | 20-10-1998          | US 5738173 A               | 14-04-1998          |
|   |   |                     | US 5850874 A               | 22-12-1998          |
|   |   |                     | US 5875850 A               | 02-03-1999          |
|   |   |                     | AU 1855799 A               | 06-05-1999          |
|   |   |                     | AU 1855899 A               | 06-05-1999          |
|   |   |                     | AU 704634 B                | 29-04-1999          |
|   |   |                     | AU 5306596 A               | 02-10-1996          |
|   |   |                     | BR 9607196 A               | 11-11-1997          |
|   |   |                     | CA 2214798 A               | 19-09-1996          |
|   |   |                     | EP 0813647 A               | 29-12-1997          |
|   |   |                     | WO 9628633 A               | 19-09-1998          |
|   |   |                     | US 5845708 A               | 08-12-1998          |
|   |   |                     | US 5890534 A               | 06-04-1999          |
|   |   |                     | NO 974168 A                | 07-11-1997          |
| EP 0396204                                | A | 07-11-1990          | AU 620711 B                | 20-02-1992          |
|   |   |                     | AU 5460290 A               | 08-11-1990          |
|   |   |                     | CA 2015844 A               | 03-11-1990          |
|   |   |                     | DE 69002860 D              | 30-09-1993          |
|   |   |                     | DE 69002860 T              | 23-12-1993          |
|   |   |                     | JP 2304195 A               | 17-12-1990          |
|   |   |                     | JP 2747084 B               | 06-05-1998          |
|   |   |                     | NO 301032 B                | 01-09-1997          |
|   |   |                     | US 5071053 A               | 10-12-1991          |
| US 3667554                                | A | 06-06-1972          | US 3724567 A               | 03-04-1973          |
| US 3724567                                | A | 03-04-1973          | US 3667554 A               | 06-06-1972          |
| US 4848455                                | A | 18-07-1989          | SE 461050 B                | 18-12-1989          |
|   |   |                     | GB 2212838 A               | 02-08-1989          |
|   |   |                     | SE 8704678 A               | 26-05-1989          |
| US 5013880                                | A | 07-05-1991          | DE 3839633 C               | 05-04-1990          |
|   |   |                     | EP 0370183 A               | 30-05-1990          |
|   |   |                     | JP 2151369 A               | 11-06-1990          |
| GB 1405359                                | A | 10-09-1975          | NONE                       |                     |

TH

From the  
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

To:

PRINS, A.W.  
VEREENIGDE  
Nieuwe Parklaan 97

2587 BN Den Haag

PAYS-BAS

10 MEI 2001

TERMIJN

Beantwoord

Voorl.

def.

MAP

Bericht gezonden

aan

dd.

Applicant's or agent's file reference

PC49447PC00

PCT  
WRF<sub>2</sub> 19-7-2001

NOTIFICATION OF TRANSMITTAL OF  
THE INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT

(PCT Rule 71.1)

Date of mailing

(day/month/year)

04.05.2001

IMPORTANT NOTIFICATION

International application No.

PCT/NL99/00366

International filing date (day/month/year)

11/06/1999

Priority date (day/month/year)

19/01/1999

Applicant

WELL ENGINEERING PARTNERS B.V. et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

#### 4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/



European Patent Office  
D-80298 Munich

Tel. +49 89 2399 - 0 Tx: 523656 epmu d

Authorized officer

Miehle, S





# PATENT COOPERATION TREATY

## PCT


### INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

|  |   |   |
|--|---|---|
| Applicant's or agent's file reference<br><b>PC49447PC00</b>                                      | <b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416) |   |
| International application No.<br><b>PCT/NL99/00366</b>   | International filing date (day/month/year)<br><b>11/06/1999</b>   | Priority date (day/month/year)<br><b>19/01/1999</b> |
| International Patent Classification (IPC) or national classification and IPC<br><b>E21B19/22</b> |   |   |
| Applicant<br><b>WELL ENGINEERING PARTNERS B.V. et al.</b>  |   |   |

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 8 sheets, including this cover sheet.  
  
☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).  
  
 These annexes consist of a total of 7 sheets.

3. This report contains indications relating to the following items:
  - I    ☒ Basis of the report
  - II   ☐ Priority
  - III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
  - IV   ☐ Lack of unity of invention
  - V    ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
  - VI   ☐ Certain documents cited
  - VII ☒ Certain defects in the international application
  - VIII ☐ Certain observations on the international application

|  |  |
|--|--|
| Date of submission of the demand<br><br><b>18/08/2000</b>  | Date of completion of this report<br><br><b>04.05.2001</b> |
| Name and mailing address of the international preliminary examining authority:<br><br> <b>European Patent Office</b><br><b>D-80298 Munich</b><br><small>Tel.: +49 89 2369-0 Fax: +49 89 2369-1000</small> | Authorized officer<br><br><b>Ott, S</b>                    |



# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/NL99/00366

## I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-17 as originally filed

**Claims, No.:**

1-29 with telefax of 16/04/2001

**Drawings, sheets:**

1/3-3/3 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/NL99/00366

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

|                               |      |        |      |
|-------------------------------|------|--------|------|
| Novelty (N)                   | Yes: | Claims | 1-29 |
|                               | No:  | Claims |      |
| Inventive step (IS)           | Yes: | Claims | 1-29 |
|                               | No:  | Claims |      |
| Industrial applicability (IA) | Yes: | Claims | 1-29 |
|                               | No:  | Claims |      |

2. Citations and explanations  
**see separate sheet**

## VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:  
**see separate sheet**

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/NL99/00366

Reference is made to the following document:

D1: US-3677345

**POINT V**

V-1. D1 discloses a method for introducing a tube (T) into a borehole ((11), see also col.2, l.22-24) in the ground, comprising the actions of:  
composing said tube (T) by connecting successive tube parts (15) end-to-end in a connecting area ((13), (20)), and  
axially displacing at least a composed section of said tube (T) from said connecting area ((13), (20)) towards said borehole and introducing at least a substantial portion of said tube or said composed section thereof into said borehole (fig.1),  
said connecting area ((13), (20)) being located at least horizontally spaced away from the borehole (fig.1), and said axial displacement of said tube (T) or said composed section thereof from said connecting area to said borehole proceeding along an at least partially curved path (18).

The subject-matter of claim 1 differs from the disclosure of D1 in that said connection of successive tube parts end-to-end into said tube is completed before said tube is brought in communication with said borehole.

This difference which permits complete assembly of the tube prior to introduction into the borehole therefore avoiding delays in the introduction due to the assembly of further tube parts and danger from blow-outs and explosions is neither disclosed nor suggested by the available prior art.

The subject-matter of claim 1 does therefore meet the requirements of novelty, inventive step and industrial applicability in the sense of Art. 33 PCT.

V-2. D1 discloses a method for introducing a tube (T) into a borehole ((11), see also col.2, l.22-24) in the ground, comprising the actions of:  
composing said tube (T) by connecting successive tube parts (15) end-to-end in a connecting area ((13), (20)), and  
axially displacing at least a composed section of said tube (T) from said connecting area ((13), (20)) towards said borehole and introducing at least a substantial portion of said tube or said composed section thereof into said

borehole (fig.1),

said connecting area ((13), (20)) being located at least horizontally spaced away from the borehole (fig.1), and said axial displacement of said tube (T) or said composed section thereof from said connecting area to said borehole proceeding along an at least partially curved path (18).

The subject-matter of claim 9 differs from the disclosure of D1 in that portions of said tube or said composed section thereof proceeding along said curved path are bent into at most one single curve.

This difference is neither disclosed nor suggested by any of the available prior art and the subject-matter of claim 9 does therefore meet the requirements of novelty, inventive step and industrial applicability in the sense of Art. 33 PCT.

- V-3. D1 discloses a method for introducing a tube (T) into a borehole ((11), see also col.2, l.22-24) in the ground, comprising the actions of:  
composing said tube (T) by connecting successive tube parts (15) end-to-end in a connecting area ((13), (20)), and  
axially displacing at least a composed section of said tube (T) from said connecting area ((13), (20)) towards said borehole and introducing at least a substantial portion of said tube or said composed section thereof into said borehole (fig.1),  
said connecting area ((13), (20)) being located at least horizontally spaced away from the borehole (fig.1), and said axial displacement of said tube (T) or said composed section thereof from said connecting area to said borehole proceeding along an at least partially curved path (18).  
The subject-matter of claim 12 differs from the disclosure of D1 in that each portion of said tube or said composed section thereof is bent to a curved shape in exclusively one direction relative to that portion of said tube.  
This difference is neither disclosed nor suggested by any of the available prior art and the subject-matter of claim 12 does therefore meet the requirements of novelty, inventive step and industrial applicability in the sense of Art. 33 PCT.
- V-4. D1 discloses a method for retracting or removing a tube (T) from a borehole in the ground, comprising the actions of:  
retracting at least a substantial portion of said tube (T) from said borehole (claim 20, l.72-73),

axially displacing said tube (T) from said borehole towards a connecting area (20) (claim 20, I.73-74), and  
disconnecting tube parts (15) from said tube (T) in said connecting area (20) (claim 20, I.74),  
said connecting area (20) being located at least horizontally spaced away from the borehole (see fig.1), and that said axial displacement of said tube (T) from said borehole to said connecting area (20) proceeding along an at least partially curved path (18).

The subject-matter of claim 16 differs from the disclosure of D1 in that portions of said tube or said composed section thereof proceeding along said curved path are bent into at most one single curve.

This difference is neither disclosed nor suggested by any of the available prior art and the subject-matter of claim 16 does therefore meet the requirements of novelty, inventive step and industrial applicability in the sense of Art. 33 PCT.

V-5. D1 discloses a method for retracting or removing a tube (T) from a borehole in the ground, comprising the actions of:

retracting at least a substantial portion of said tube (T) from said borehole (claim 20, I.72-73),

axially displacing said tube (T) from said borehole towards a connecting area (20) (claim 20, I.73-74), and

disconnecting tube parts (15) from said tube (T) in said connecting area (20) (claim 20, I.74),

said connecting area (20) being located at least horizontally spaced away from the borehole (see fig.1), and that said axial displacement of said tube (T) from said borehole to said connecting area (20) proceeding along an at least partially curved path (18).

The subject-matter of claim 17 differs from the disclosure of D1 in that each portion of said tube or said composed section thereof is bent to a curved shape in exclusively one direction relative to that portion of said tube.

This difference is neither disclosed nor suggested by any of the available prior art and the subject-matter of claim 17 does therefore meet the requirements of novelty, inventive step and industrial applicability in the sense of Art. 33 PCT.

V-6. D1 discloses an installation for composing a tube and introducing same via well

head into a borehole in the ground, comprising (see fig.1):  
a connection structure (20) for composing the tube (T) by connecting successive tube parts (15) end-to-end in a connecting area (20), and  
a transport structure (16) for axially displacing said tube (T) or a composed section thereof from the connection structure (20) towards the well head (11), and  
for introducing at least a substantial portion of said tube (T) or said composed section thereof into said well head (11),  
said connecting area (20) being located at least horizontally spaced away (see fig.1) from said well head (11) and said transport structure (16) being arranged for axially displacing said tube (T) or said composed section thereof along an at least partially curved path (18).

The subject-matter of claim 18 differs from the disclosure of D1 in that said transport structure is arranged for bending portions of said tube or said composed section thereof proceeding along said curved path into at most one single curve. This difference is neither disclosed nor suggested by any of the available prior art and the subject-matter of claim 18 does therefore meet the requirements of novelty, inventive step and industrial applicability in the sense of Art. 33 PCT.

V-7. D1 discloses an installation for composing a tube and introducing same via well head into a borehole in the ground, comprising (see fig.1):  
a connection structure (20) for composing the tube (T) by connecting successive tube parts (15) end-to-end in a connecting area (20), and  
a transport structure (16) for axially displacing said tube (T) or a composed section thereof from the connection structure (20) towards the well head (11), and  
for introducing at least a substantial portion of said tube (T) or said composed section thereof into said well head (11),  
said connecting area (20) being located at least horizontally spaced away (see fig.1) from said well head (11) and said transport structure (16) being arranged for axially displacing said tube (T) or said composed section thereof along an at least partially curved path (18).

The subject-matter of claim 19 differs from the disclosure of D1 in that said transport structure is arranged for bending each portion of said tube or said composed section thereof to a curved shape in exclusively one direction relative to that portion of said tube.

This difference is neither disclosed nor suggested by any of the available prior art

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/NL99/00366

and the subject-matter of claim 19 does therefore meet the requirements of novelty, inventive step and industrial applicability in the sense of Art. 33 PCT.

V-8. The subject-matter of claims 2-8, 10, 11, 13-15, 20-29 meets the requirements of novelty, inventive step and industrial applicability in the sense of Art. 33 PCT as being dependent on claims the subject-matter of which meets said requirements.

**POINT VII**

The claims are not supported by the description (see for instance p.1, l.3-8, mentioning the introductory portion of the independent claims). The application does not meet the requirements of Art.6 PCT.



09/889726

JC18 Rec'd PCT/PTO 1 8 JUL 2001

-18-

Claims

1. A method for introducing a tube (2; 52; 102) into a borehole (1) in the ground, comprising the actions of:

composing said tube (2; 52; 102) by connecting successive tube parts (8; 58) end-to-end in a connecting  
5 area, and

axially displacing at least a composed section of said tube (2; 52; 102) from said connecting area towards said borehole (1) and introducing at least a substantial portion of said tube or said composed section thereof (2; 52; 102)  
10 into said borehole (1),

said connecting area being located at least horizontally spaced away from the borehole (1), and said axial displacement of said tube or said composed section thereof (2; 52; 102) from said connecting area to said  
15 borehole (1) proceeding along an at least partially curved path (69; 128, 129),

characterized in that said connection of successive tube parts (8; 58) end-to-end into said tube (2; 52; 102) is completed before said tube (2; 52; 102) is brought in  
20 communication with said borehole (1).

2. A method according to claim 1, wherein said path along which said tube or said composed section thereof (102) is displaced includes at least one complete winding.

3. A method according to claim 2, wherein said path  
25 along which said tube or said composed section thereof (102) is displaced includes at least a spiral or helical portion.

4. A method according to any one of the preceding claims, wherein said tube parts are oriented at an angle to a topmost portion of said borehole (1) during said  
30 connection of said tube parts.

5. A method according to claim 4, wherein said tube parts are oriented substantially horizontally during said connection of said tube parts.

6. A method according to any one of the preceding  
35 claims, wherein said tube or said composed section thereof

-19-

(2; 52; 102) is plastically bent to a curved shape where it enters a curved portion of said path.

7. A method according to claim 6, wherein plastically bent portions of said tube or said composed section thereof  
5 (2; 52; 102) are plastically straightened where it leaves said curved portion of said path.

8. A method according to claim 6 or 7, wherein maximum total deformation during said bending into said curved shape is less than 2%.

10 9. A method for introducing a tube (2; 52; 102) into a borehole (1) in the ground, comprising the actions of:

composing said tube (2; 52; 102) by connecting successive tube parts (8; 58) end-to-end in a connecting area, and

15 axially displacing at least a composed section of said tube (2; 52; 102) from said connecting area towards said borehole (1) and introducing at least a substantial portion of said tube or said composed section thereof (2; 52; 102) into said borehole (1),

20 said connecting area being located at least horizontally spaced away from the borehole (1), and said axial displacement of said tube or said composed section thereof (2; 52; 102) from said connecting area to said borehole (1) proceeding along an at least partially curved  
25 path (69; 128, 129), **characterized in that** portions of said tube or said composed section thereof (2; 52; 102) proceeding along said curved path are bent into at most one single curve.

10. A method according to claim 9, wherein said tube  
30 or said composed section thereof (2; 52; 102) is plastically bent to a curved shape where it enters a curved portion of said path, wherein plastically bent portions of said tube or said composed section thereof (2; 52; 102) are plastically straightened where it leaves said curved portion of said  
35 path, and wherein said plastical straightening of said tube or said composed section thereof (2; 52; 102) when leaving said curved portion of said path occurs a single time at

-20-

most for each portion of said tube or said composed section thereof (2; 52; 102).

11. A method according to any one of the preceding claims, wherein portions of said tube or said composed  
5 section thereof (8; 58) proceeding along a curved section (69; 128, 129) of said path are in an at least elastically deformed condition.

12. A method for introducing a tube (2; 52; 102) into a borehole (1) in the ground, comprising the actions of:  
10 composing said tube (2; 52; 102) by connecting successive tube parts (8; 58) end-to-end in a connecting area, and

axially displacing at least a composed section of said tube (2; 52; 102) from said connecting area towards said  
15 borehole (1) and introducing at least a substantial portion of said tube or said composed section thereof (2; 52; 102) into said borehole (1),

said connecting area being located at least horizontally spaced away from the borehole (1), and said  
20 axial displacement of said tube or said composed section thereof (2; 52; 102) from said connecting area to said borehole (1) proceeding along an at least partially curved path (69; 128, 129), characterized in that each portion of said tube or said composed section thereof (2; 52; 102) is  
25 bent to a curved shape in exclusively one direction relative to that portion of said tube (2; 52; 102).

13. A method according to any one of the preceding claims, wherein the borehole (1) in the area of a well head (13; 63, 113) is held sealed against said tube or said  
30 composed section thereof (2; 52; 102), and wherein an overpressure prevails under the sealing (16).

14. A method according to any one of the preceding claims, wherein said connecting of said the tube parts (8; 58) is carried out by welding.

35 15. A method according to claim 14, wherein the welding occurs in a screened space (12).

-21-

16. A method for retracting or removing a tube (2; 52; 102) from a borehole (1) in the ground, comprising the actions of:

retracting at least a substantial portion of said tube  
5 (2; 52; 102) from said borehole (1),

axially displacing said tube (2; 52; 102) from said borehole (1) towards a connecting area, and

disconnecting tube parts from said tube (2; 52; 102) in said connecting area,

10 said connecting area being located at least horizontally spaced away from the borehole (1), and that said axial displacement of said tube (2; 52; 102) from said borehole (1) to said connecting area proceeding along an at least partially curved path (69; 128, 129),

15 characterized in that portions of said tube or said composed section thereof (2; 52; 102) proceeding along said curved path are bent into at most one single curve.

17. A method for retracting or removing a tube (2; 52; 102) from a borehole (1) in the ground, comprising the  
20 actions of:

retracting at least a substantial portion of said tube (2; 52; 102) from said borehole (1),

axially displacing said tube (2; 52; 102) from said borehole (1) towards a connecting area, and

25 disconnecting tube parts from said tube (2; 52; 102) in said connecting area,

said connecting area being located at least horizontally spaced away from the borehole (1), and that said axial displacement of said tube (2; 52; 102) from said  
30 borehole (1) to said connecting area proceeding along an at least partially curved path (69; 128, 129),

characterized in that each portion of said tube or said composed section thereof (2; 52; 102) is bent to a curved shape in exclusively one direction relative to that  
35 portion of said tube (2; 52; 102).

-22-

18. An installation for composing a tube (2; 52; 102) and introducing same via a well head (13; 63, 113) into a borehole (1) in the ground, comprising:

5 a connection structure (6; 56) for composing the tube (2; 52; 102) by connecting successive tube parts (8; 58) end-to-end in a connecting area, and

10 a transport structure (3, 4, 5; 53, 67, 68; 117, 124, 125, 130) for axially displacing said tube or a composed section thereof (2; 52; 102) from the connection structure (6; 56) towards the well head (13; 63, 113), and for introducing at least a substantial portion of said tube or said composed section thereof (2; 52; 102) into said well head (13; 63, 113),

15 said connecting area being located at least horizontally spaced away from said well head (13; 63, 113), and said transport structure (3, 4, 5; 53, 67, 68; 117, 124, 125, 130) being arranged for axially displacing said tube or said composed section thereof (2; 52; 102) along an at least partially curved path (69; 128, 129),

20 characterized in that said transport structure (3, 4, 5; 53, 67, 68; 117, 124, 125, 130) is arranged for bending portions of said tube or said composed section thereof (2; 52; 102) proceeding along said curved path into at most one single curve.

25 19. An installation for composing a tube (2; 52; 102) and introducing same via a well head (13; 63, 113) into a borehole (1) in the ground, comprising:

30 a connection structure (6; 56) for composing the tube (2; 52; 102) by connecting successive tube parts (8; 58) end-to-end in a connecting area, and

a transport structure (3, 4, 5; 53, 67, 68; 117, 124, 125, 130) for axially displacing said tube or a composed section thereof (2; 52; 102) from the connection structure (6; 56) towards the well head (13; 63, 113), and for  
35 introducing at least a substantial portion of said tube or said composed section thereof (2; 52; 102) into said well head (13; 63, 113),

-23-

said connecting area being located at least horizontally spaced away from said well head (13; 63, 113), and said transport structure (3, 4, 5; 53, 67, 68; 117, 124, 125, 130) being arranged for axially displacing said tube or  
5 said composed section thereof (2; 52; 102) along an at least partially curved path (69; 128, 129),

characterized in that said transport structure (3, 4, 5; 53, 67, 68; 117, 124, 125, 130) is arranged for bending each portion of said tube or said composed section thereof  
10 (2; 52; 102) to a curved shape in exclusively one direction relative to that portion of said tube (2; 52; 102).

20. An installation according to claim 18 or 19, wherein said connection structure (6; 56) is provided with a passage (15) for receiving a tube part (8; 58) to be  
15 connected, said passage (15) being located out of alignment with the well head (13; 63, 113), and said passage (15) being oriented at an angle with respect to the well head (13; 63, 113).

21. An installation according to claim 20, wherein  
20 said passage (15) is oriented horizontally.

22. An installation according to any one of claims 18-21, wherein said transport structure comprises: a bending machine (67; 117) for plastically bending tube material to a curved form, having an inlet for leading in tube material to  
25 be bent, in line with a portion of said path section connected to and downstream of said connection structure (56).

23. An installation according to claim 22, wherein said transport structure further comprises a bending-back  
30 machine (68; 130) for plastically straightening tube material from a curved form to an at least straighter form, said bending-back machine (68; 130) having an outlet for leading out tube material, located in line with the well head (13; 63, 113).

35 24. An installation according to claim 22, wherein said bending machine (117) is reciprocable between a run-in position with an inlet for leading in tube material to be

-24-

bent in line with a supply path section connected to and downstream of the connection structure, and a run-out position (117') along a vertical portion of said path substantially parallel to an main passage of said well head  
5 (113).

25. An installation according to any one of claims 22-24, wherein said at least partially curved path (69; 128) defined by the transport structure (53, 67, 68; 117, 124, 125, 130) has a smallest radius, and wherein said bending  
10 machine (67; 117) for plastically deforming tube material to a curved form is arranged for applying a plastic deformation which results in a radius in unloaded condition that is greater than said smallest radius of said at partially curved path (69; 128).

15 26. An installation according to any one of claims 19-25, wherein said transport structure (117, 124, 125, 130) is arranged for keeping said tube (102) in an at least spirally or helically curved configuration (128).

27. An installation according to any one of claims  
20 19-26, further comprising a sealing (16) for sealing the well head (13; 63, 113) against said tube or a composed section thereof (2; 52; 102) for preventing fluid from flowing out of the borehole (1).

28. An installation according to any one of claims  
25 19-27, wherein said connection structure (6; 56) is in the form of a welding device.

29. An installation according to claim 28, wherein the welding device comprises a screening (14) surrounding the welding device.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   |    |  | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | ML | Mali   | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MN | Mongolia                                     | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MR | Mauritania                                   | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MW | Malawi                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | MX | Mexico                                       | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NE | Niger  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NL | Netherlands                                  | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NO | Norway                                       | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | NZ | New Zealand                                  |    |                          |
| CM | Cameroon                 |    |  | PL | Poland                                       |    |                          |
| CN | China                    | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CU | Cuba                     | KZ | Kazakistan                               | RO | Romania                                      |    |                          |
| CZ | Czech Republic           | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| DE | Germany                  | LI | Liechtenstein                            | SD | Sudan  |    |                          |
| DK | Denmark                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| EE | Estonia                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |



# INTERNATIONAL SEARCH REPORT

Inte ☐ Oral Application No

PCT/NL 99/00366

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 E21B19/22 E21B19/20

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                                | Relevant to claim No.                      |
|------------|---|--|
| X          | US 3 677 345 A (SIZER PHILLIP S)<br>18 July 1972 (1972-07-18)<br><br>column 1, line 41-48<br>column 2, line 34-55 | 1, 2, 5, 6,<br>12, 17,<br>19-21,<br>26, 27 |
| Y          | ---   | 7, 8, 15,<br>16, 28, 29                    |
| Y          | US 5 823 267 A (MAKOHL FRIEDHELM ET AL)<br>20 October 1998 (1998-10-20)<br>column 3, line 53-60                   | 7, 8                                       |
| Y          | EP 0 396 204 A (SHELL INT RESEARCH)<br>7 November 1990 (1990-11-07)<br>claims 1, 2, 4<br>figure 1                 | 15, 16,<br>28, 29                          |
|            | ---<br>-/--   |  |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 August 1999

Date of mailing of the international search report

02/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schouten, A

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 99/00366

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|------------|--|-----------------------|
| A          | US 3 667 554 A (SMITHERMAN EUGENE A)<br>6 June 1972 (1972-06-06)<br>the whole document<br>---                                | 1,17-19               |
| A          | US 3 724 567 A (SMITHERMAN E)<br>3 April 1973 (1973-04-03)<br>the whole document<br>---                                      | 1,17-19               |
| A          | US 4 848 455 A (FENYVESI JANOS)<br>18 July 1989 (1989-07-18)<br>the whole document<br>---                                    | 1,17-19               |
| A          | US 5 013 880 A (PUETTMANN FRANZ-JOSEF)<br>7 May 1991 (1991-05-07)<br>claim 1<br>---  | 15,16,<br>28,29       |
| A          | GB 1 405 359 A (INST ELEKTROSWARKI<br>PATONA;NAUK UK SSSR)<br>10 September 1975 (1975-09-10)<br>claim 1<br>figure 2<br>----- | 15,16,<br>28,29       |

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NL 99/00366

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| US 3677345                                | A | 18-07-1972          | NONE                       |                     |
| US 5823267                                | A | 20-10-1998          | US 5738173 A               | 14-04-1998          |
|   |   |                     | US 5850874 A               | 22-12-1998          |
|   |   |                     | US 5875850 A               | 02-03-1999          |
|   |   |                     | AU 1855799 A               | 06-05-1999          |
|   |   |                     | AU 1855899 A               | 06-05-1999          |
|   |   |                     | AU 704634 B                | 29-04-1999          |
|   |   |                     | AU 5306596 A               | 02-10-1996          |
|   |   |                     | BR 9607196 A               | 11-11-1997          |
|   |   |                     | CA 2214798 A               | 19-09-1996          |
|   |   |                     | EP 0813647 A               | 29-12-1997          |
|   |   |                     | WO 9628633 A               | 19-09-1998          |
|   |   |                     | US 5845708 A               | 08-12-1998          |
|   |   |                     | US 5890534 A               | 06-04-1999          |
|   |   |                     | NO 974168 A                | 07-11-1997          |
| EP 0396204                                | A | 07-11-1990          | AU 620711 B                | 20-02-1992          |
|   |   |                     | AU 5460290 A               | 08-11-1990          |
|   |   |                     | CA 2015844 A               | 03-11-1990          |
|   |   |                     | DE 69002860 D              | 30-09-1993          |
|   |   |                     | DE 69002860 T              | 23-12-1993          |
|   |   |                     | JP 2304195 A               | 17-12-1990          |
|   |   |                     | JP 2747084 B               | 06-05-1998          |
|   |   |                     | NO 301032 B                | 01-09-1997          |
|   |   |                     | US 5071053 A               | 10-12-1991          |
| US 3667554                                | A | 06-06-1972          | US 3724567 A               | 03-04-1973          |
| US 3724567                                | A | 03-04-1973          | US 3667554 A               | 06-06-1972          |
| US 4848455                                | A | 18-07-1989          | SE 461050 B                | 18-12-1989          |
|   |   |                     | GB 2212838 A               | 02-08-1989          |
|   |   |                     | SE 8704678 A               | 26-05-1989          |
| US 5013880                                | A | 07-05-1991          | DE 3839633 C               | 05-04-1990          |
|   |   |                     | EP 0370183 A               | 30-05-1990          |
|   |   |                     | JP 2151369 A               | 11-06-1990          |
| GB 1405359                                | A | 10-09-1975          | NONE                       |                     |

## PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Assistant Commissioner for Patents  
United States Patent and Trademark  
Office  
Box PCT  
Washington, D.C. 20231  
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year)

25 September 2000 (25.09.00)

International application No.

PCT/NL99/00366

Applicant's or agent's file reference

49447PC00

International filing date (day/month/year)

11 June 1999 (11.06.99)

Priority date (day/month/year)

19 January 1999 (19.01.99)

Applicant

KOSTER, Egbert et al

1. The designated Office is hereby notified of its election made:



in the demand filed with the International Preliminary Examining Authority on:

18 August 2000 (18.08.00)



in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Juan Cruz

Telephone No.: (41-22) 338.83.38

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**